




Jaguar XF Executive

2015










92%





Safety Assist

84%

Pedestrian



80%



83%

### **SPECIFICATION**

Tested Model	Jaguar XF 2.0 diesel Prestige, RHD
Body Type	- 4 door saloon
Year Of Publication	2015
Kerb Weight	1642kg
VIN From Which Rating Applies	- from VIN 15300
Class	Executive

# **SAFETY EQUIPMENT**

	Driver	Passenger	Rear
FRONTAL CRASH PROTECTION			
Frontal airbag	•	•	_
Belt pretensioner	•	•	•
Belt loadlimiter	•	•	•
Knee airbag	×	×	_
SIDE CRASH PROTECTION			
Side head airbag	•	•	•
Side chest airbag	•	•	×
Side pelvis airbag	×	×	×



# SAFETY EQUIPMENT (NEXT)

	Driver	Passenger	Rear
CHILD PROTECTION			
Isofix	_	×	•
Integrated CRS	_	×	×
Airbag cut-off switch	_	•	_
SAFETY ASSIST			
Seat Belt Reminder	•	•	•

OTHER SYSTEMS		
Active Bonnet (Hood)	•	
ESC	•	
AEB City	•	
AEB Inter-Urban	•	
Speed Assistance System	•	
Lane Assist System	•	

Note: Other equipment m	nay be available on the	e vehicle but was not	considered in the test year.


	Fitted to the vehicle as standard	<ul> <li>Fitted to the vehicle as option</li> </ul>
--	-----------------------------------	---

O Not fitted to the test vehicle but available as option Not Available — Not Applicable







Total 35.0 Pts / 92%








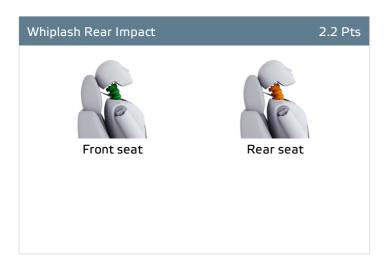

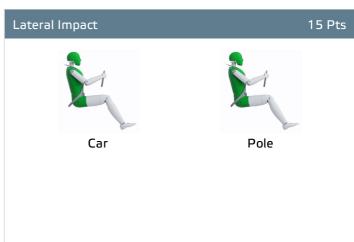

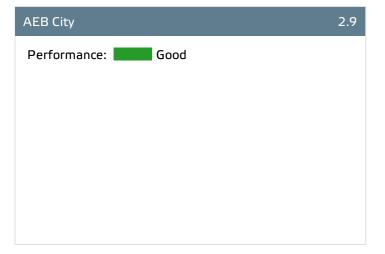






Total 35.0 Pts / 92%

#### Comments

The passenger compartment of the XF remained stable in the frontal offset test. Dummy readings indicated good protection of the knees and femurs of both the driver and passenger dummies. Jaguar showed that a similar level of protection would be provided to occupants of different sizes and to those sat in different seating positions. In the full-width rigid barrier impact, protection of the driver and rear passenger was good for all critical body regions except the chest, protection of which was adequate. In the side barrier impact, dummy results indicated good protection of all critical body areas. However, both doors on the struck side of the vehicle became unlatched during the test and, although neither door opened, the car was penalised. No doors opened in the more severe side pole test and protection was good for all critical parts of the body. In Euro NCAP's tests, the front seats and head restraints demonstrated good protection against whiplash injury in the event of a rear-end collision. A geometric assessment of the rear seats indicated marginal whiplash protection for the occupants of those seats. The XF has a standard-fit autonomous emergency braking system which provides additional protection against whiplash at low, city speeds. The system performed well in Euro NCAP's tests.



Total 41.2 Pts / 84%



Crash Test Performance 23.2 Pts





Safety Features 6 Pts

	Front Passenger	2nd row outboard	2nd row center
Isofix	×	•	×
i-Size	×	•	×
Integrated CRS	×	×	×

- Fitted to test car as standard
- O Not on test car but available as option
- 🗶 Not available

CRS Installation Check 12 Pts


- Install without problem
   Install with care
   Safety critical problem
   Installation not allowed
- Infants up to 13 kg












Total 41.2 Pts / 84%

#### Infants and toddlers up to 18 kg



#### Toddlers from 9 to 18 kg







#### Toddlers over 18 kg







Total 41.2 Pts / 84%

		Seat Position		
	Front		2nd row	
	PASSENGER	LEFT	CENTER	RIGHT
Maxi Cosi Cabriofix (Belt)	•	•	×	•
Römer King Plus (Belt)	•	•	×	•
Römer Duo Plus (ISOFIX)	×	•	×	•
Römer KidFix (Belt)	•	•	×	•
Maxi Cosi Cabriofix & EasyFix (Belt)	•	•	×	•
Maxi Cosi Cabriofix & EasyFix (ISOFIX)	×	•	×	•
BeSafe iZi Kid X3 ISOfix (ISOFIX)	×	•	×	•
Maxi Cosi Pearl & Familyfix (ISOFIX)	×	•	×	•
Römer KidFix (ISOFIX)	×	•	×	•

Install without problem

Install with care

Safety critical problem

🗶 Installation not allowed

#### Comments

The XF scored maximum points for its protection of the 1½ year dummy in the dynamic impact tests. In the frontal offset test, forward movement of the 3 year dummy, sat in a forward-facing restraint, was not excessive and protection was good except for marginally elevated neck tension. In the side barrier impact, both dummies were properly contained in the protective shells of their restraints, minimising the likelihood of head contact with parts of the vehicle interior. The front passenger airbag can be disabled to allow a rearward-facing restraint to be used in that seating position. Clear information is provided to the driver regarding the status of the airbag and the system was rewarded. All of the restraint types for which the XF is designed could be correctly installed and accommodated in the car.





Total 29.1 Pts / 80%

GOOD ADEQUATE MARGINAL WEAK POOR

Pedestrian Protection 29.1 Pts



Head Impact	18.6 Pts
Pelvis Impact	4.6 Pts
Leg Impact	5.9 Pts

#### Comments

The XF has an 'active' bonnet. Sensors in the bumper detect when a pedestrian has been struck and actuators lift the bonnet, providing greater clearance between the surface and hard structures in the engine compartment. Jaguar showed that the system worked robustly for a range of speeds and a variety of pedestrian statures. Accordingly, the bonnet was tested in the deployed (raised) position. Protection was almost exclusively good or adequate on the bonnet surface, with poor results recorded along the bottom edge of the windscreen and on the stiff windscreen pillars. The bumper provided predoninantly good protection to pedestrians' legs. The protection provided to the pelvic region was more mixed, results ranging from weak to good.





Speed Assistance 1.3 Pts

Speed Limit Information Function	N/A
Warning Function	Manually set
Speed Limitation Function	Manually set

## **Electronic Stability Control**

3 Pts

System Name	Dynamic Stability Control	
PERFORMANCE		
Vehicle Yaw Rate @ COS + 1.00 s	0.9%	meets ECE requirements
Vehicle Yaw Rate @ COS + 1.75 s	0.7%	meets ECE requirements
Lateral Displacement @ BOS + 1.07 s	3.5 m	meets ECE requirements

Seat Belt Reminder 3 Pts

Applies To	All seats		
Warning	Driver Seat	front passenger(s)	rear passenger(s)
Visual	•	•	•
Audible	•	•	•

Pass

F

Fail

— Not available

Lane Support 1 Pts

System Name	Lane Departure Warning
Туре	Lane Departure Warning
Operational From	48 km/h
Warning	Visual & Haptic
PERFORMANCE	
LDW Confirmation Test	Meets NHTSA requirements





Total 10.8 Pts / 83%

AEB Interurban 2.5 Pts

Autonomous Emergency Braking			
Forward Collision Warning with Auto-Brake			
10 Km/h			
Default On			
10-80 Km/h	10-80 Km/h		
Autobrake Function Only	Driver reacts to warning		
See AEB City	Crash avoided up to 45km/h. Crash speed reduced up to 80km/h.		
Crash avoided up to 60km/h. Crash speed reduced up to 70km/h.	Crash avoided up to 75km/h. Crash speed reduced up to 80km/h.		
FOLLOWING A CAR AT SHORT DISTANCE			
Avoidance	Avoidance		
Mitigation	Mitigation		
FOLLOWING A CAR AT LONG DISTANCE			
Mitigation	Avoidance		
Mitigation	Mitigation		
	Forward Collision Wa  10 P  Defau  10-80 Km/h  Autobrake Function Only  See AEB City  Crash avoided up to 60km/h. Crash speed reduced up to 70km/h.  LLOWING A CAR AT SHORT DISTANCE  Avoidance  Mitigation  LLOWING A CAR AT LONG DISTANCE  Mitigation		

#### Comments

All features assessed by Euro NCAP for Safety Assist are standard equipment on the XF: it has electronic stability control; a seatbelt reminder for the front and rear seats; a driver-set speed limiter; a lane departure warning system; and its autonomous emergency braking system works also at inter-urban speeds and demonstrated good performance in Euro NCAP's tests. Cars before VIN number 15300 differ from the test vehicles in having a seatbelt reminder which is is not sufficiently loud and clear to meet Euro NCAP's requirements.